
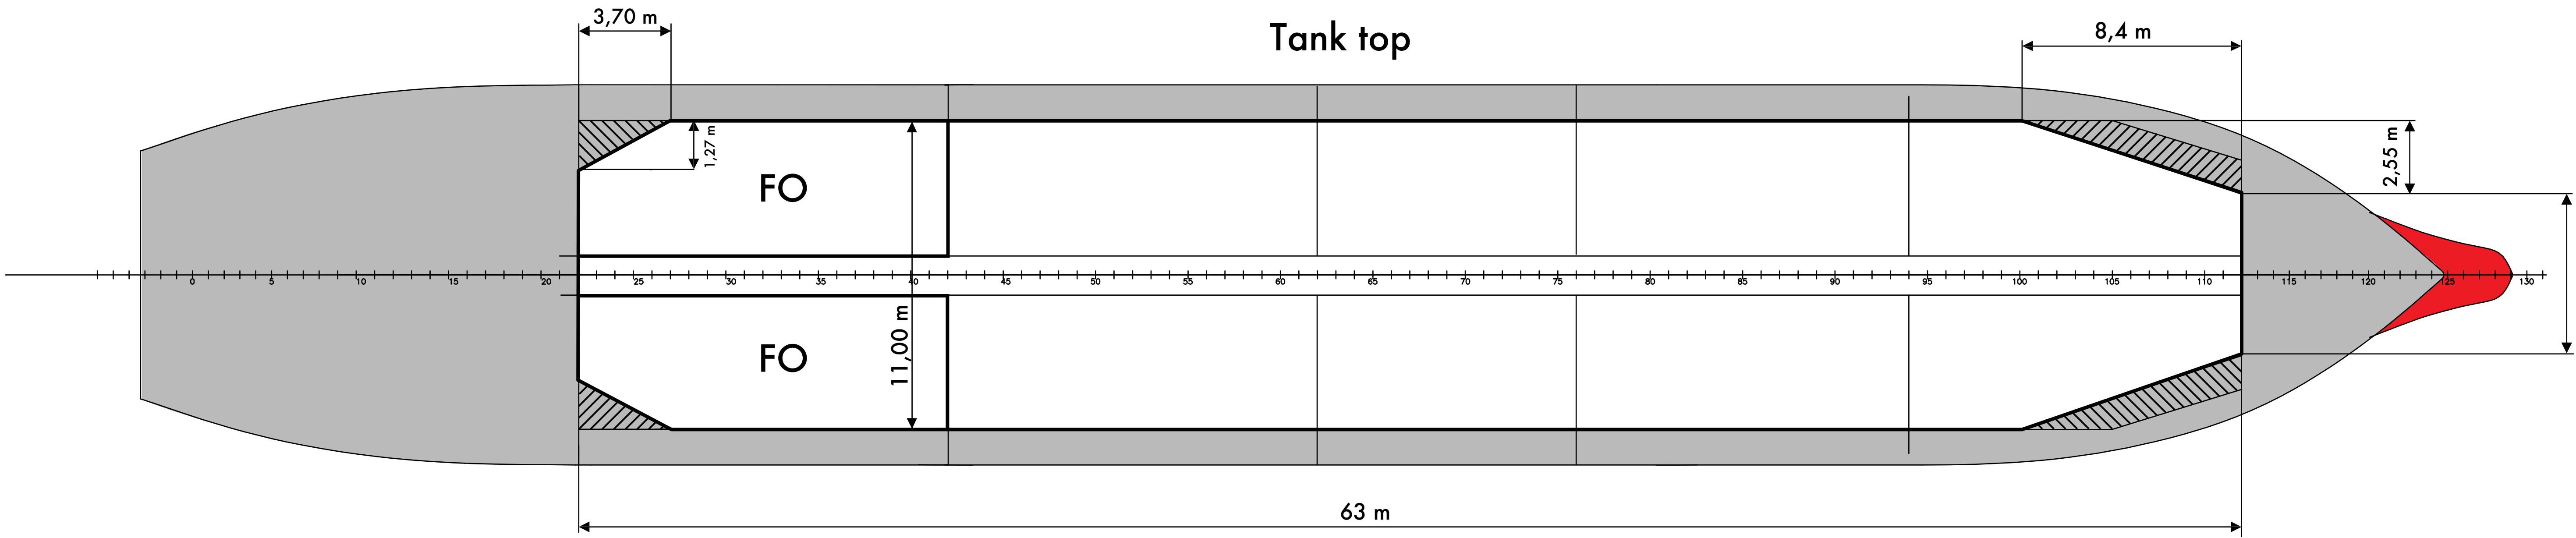
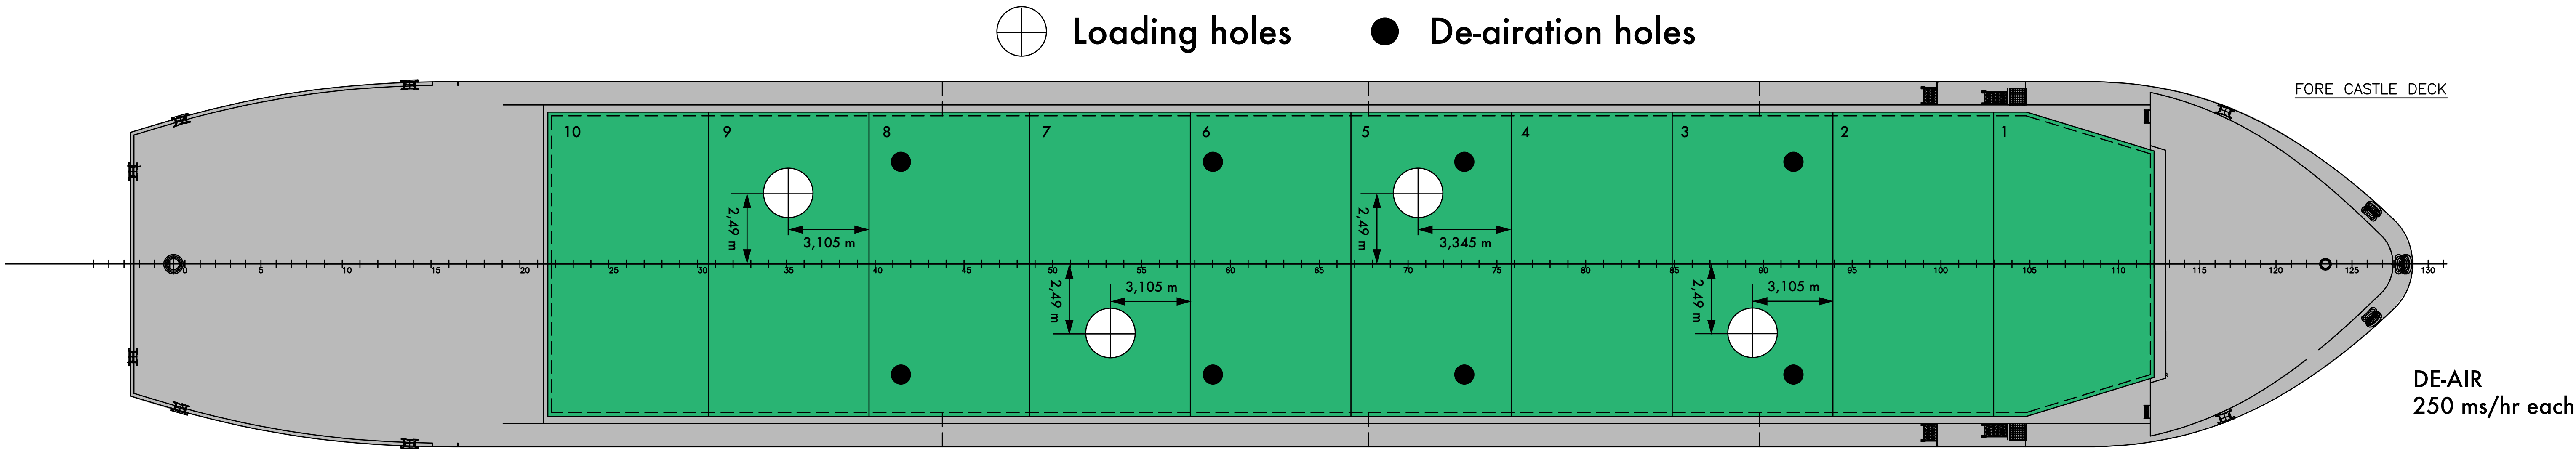







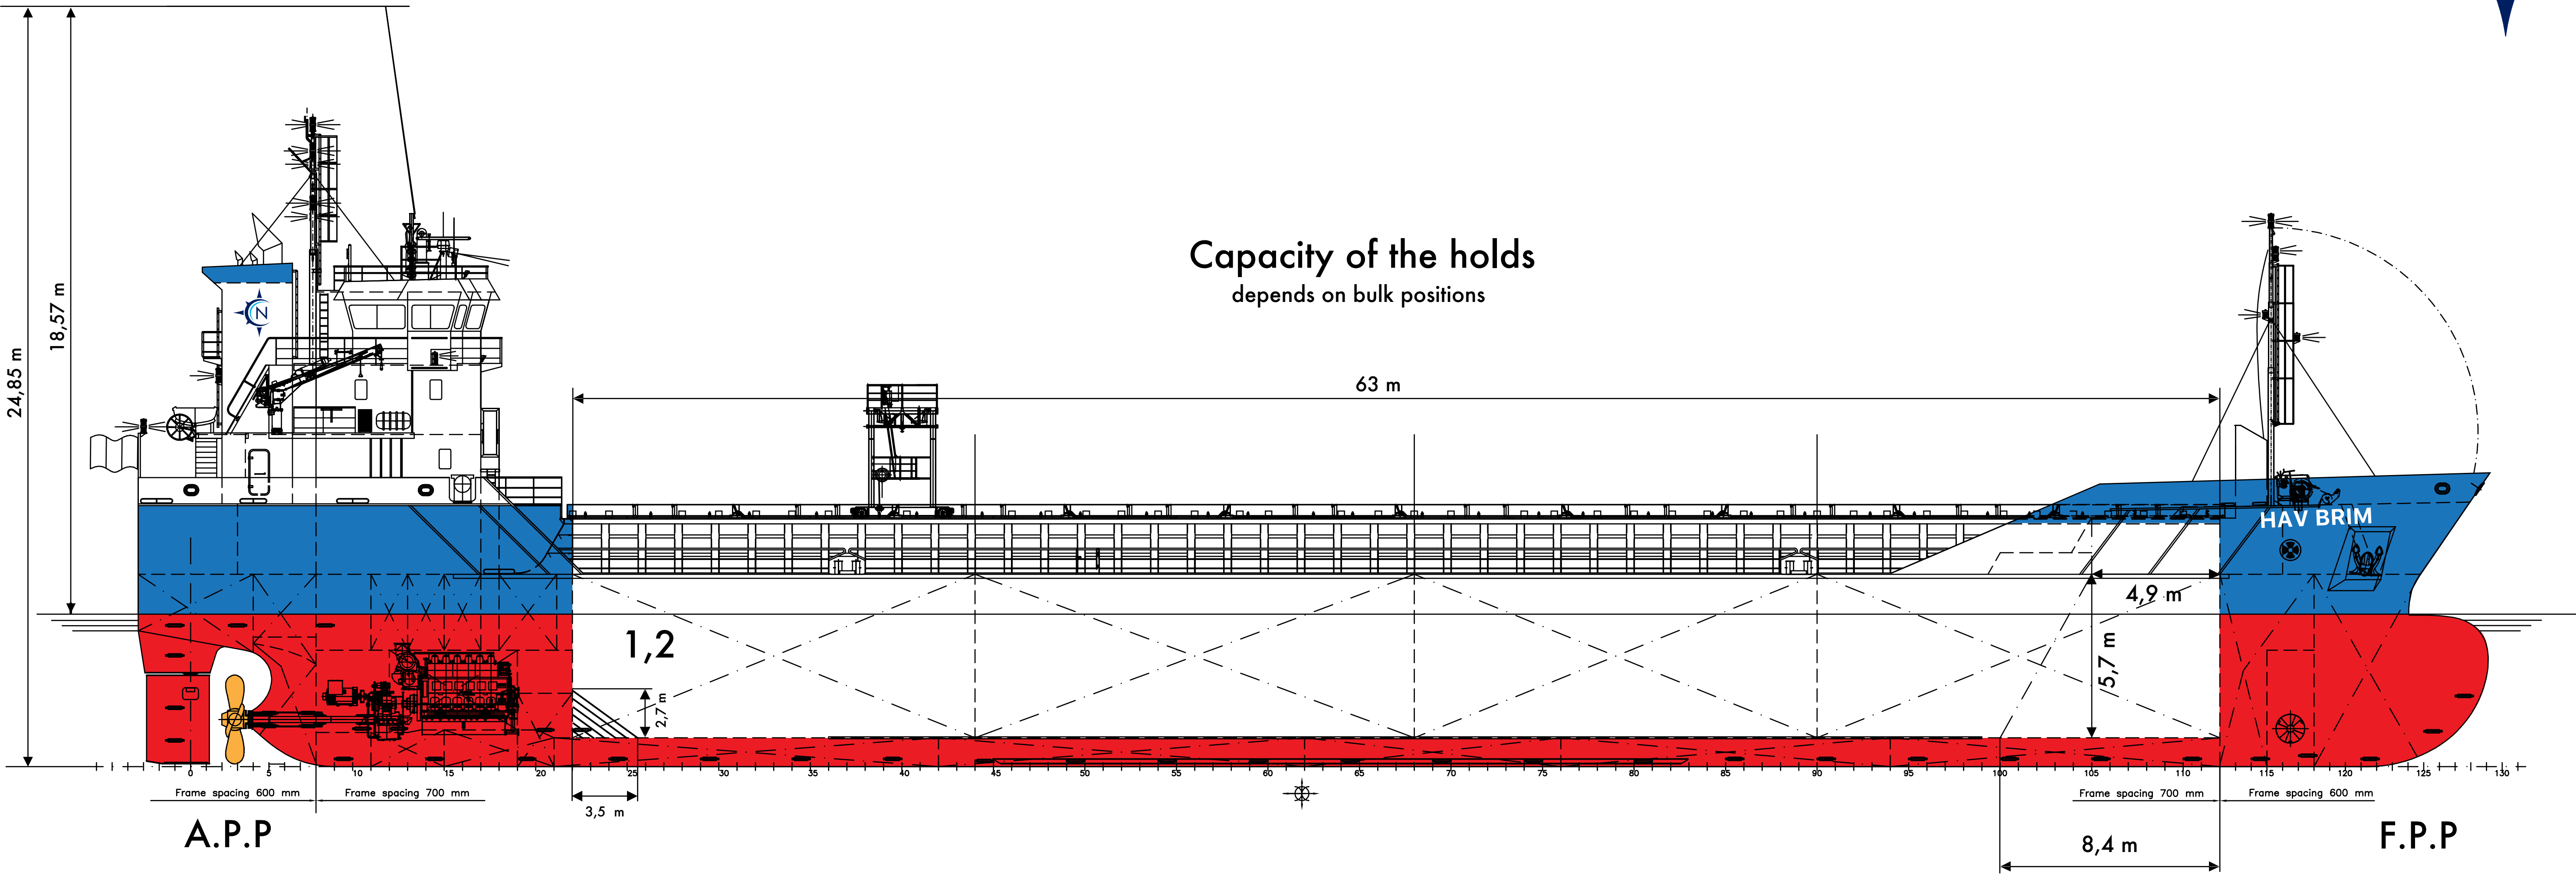


Ballast: Water line to hatch coaming: 6,45 m
Fully ladden: Water line to hatch coaming: 3,19 m
Cement holes: Ø470 mm

Max Summer draft : 6,28m
Max winter draft er: 6,15m
Max winter draft N.A.: 6,10m

Winter 1. November – 31. mars
Winter North Atlantic. 15. October - 16. april

CROSS SECTION

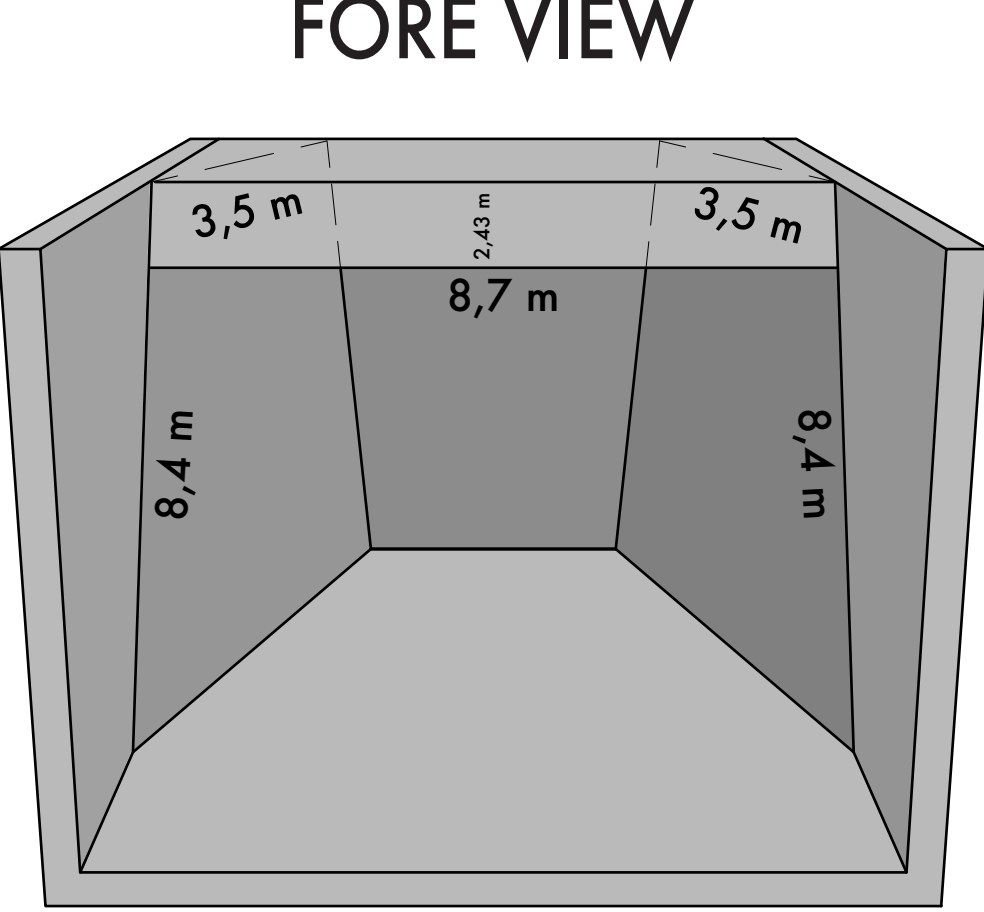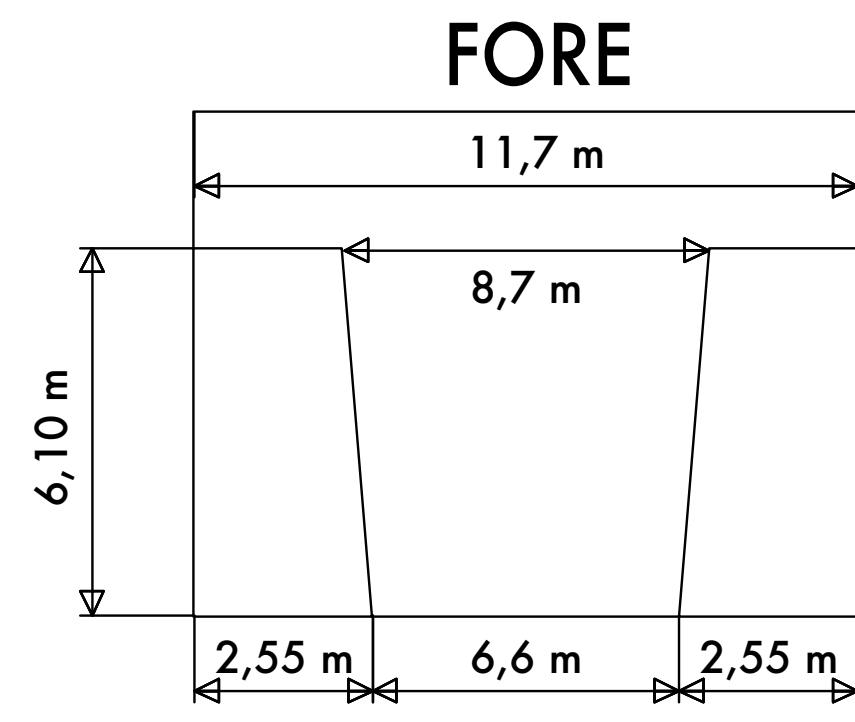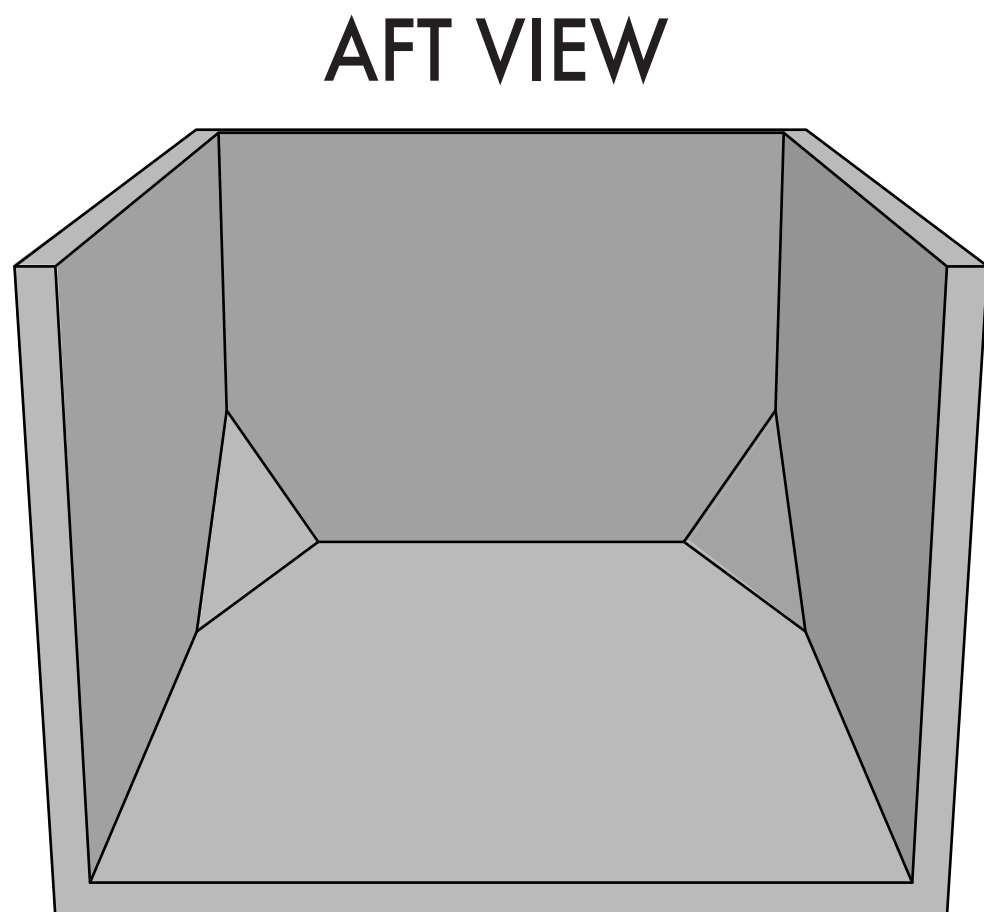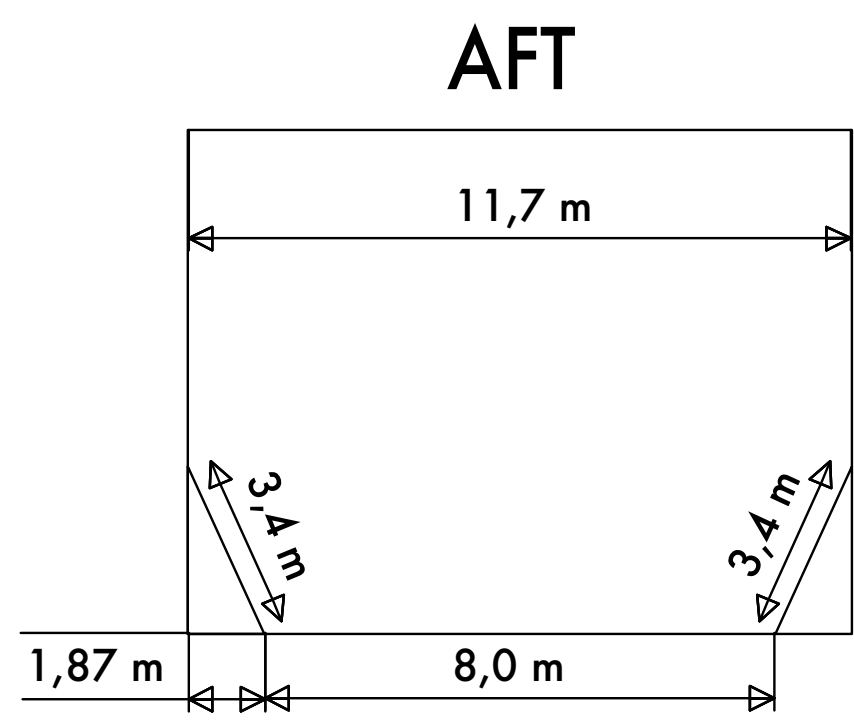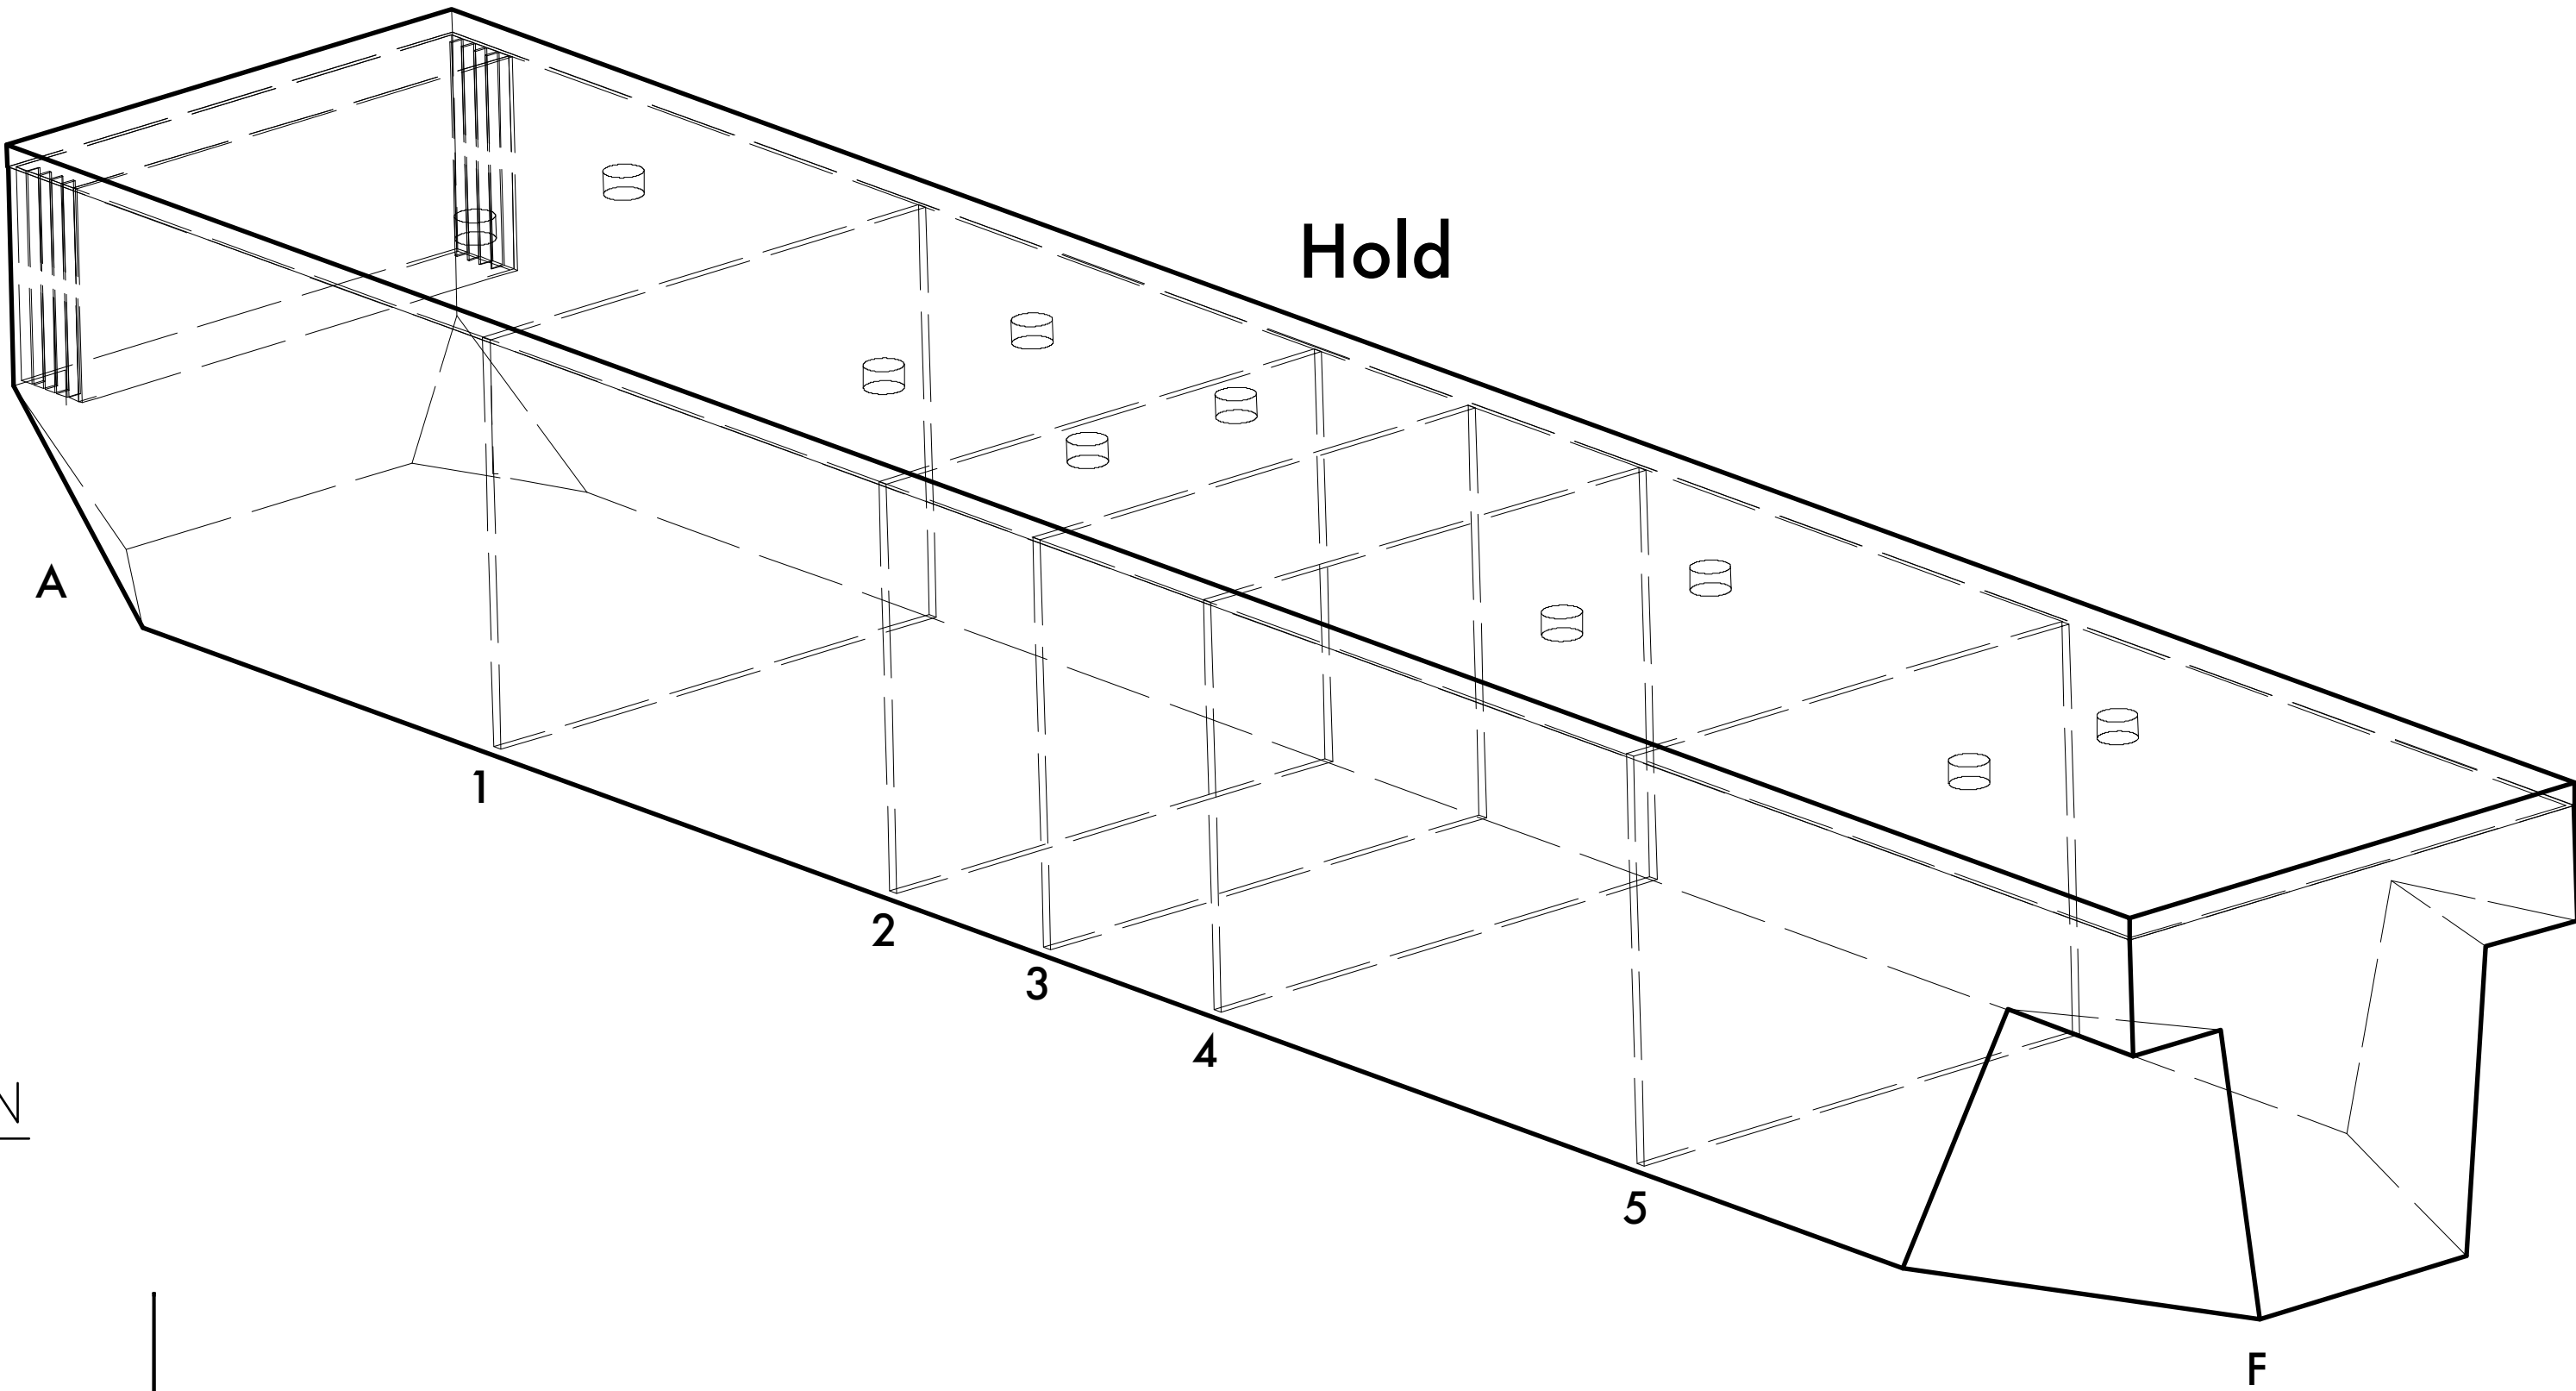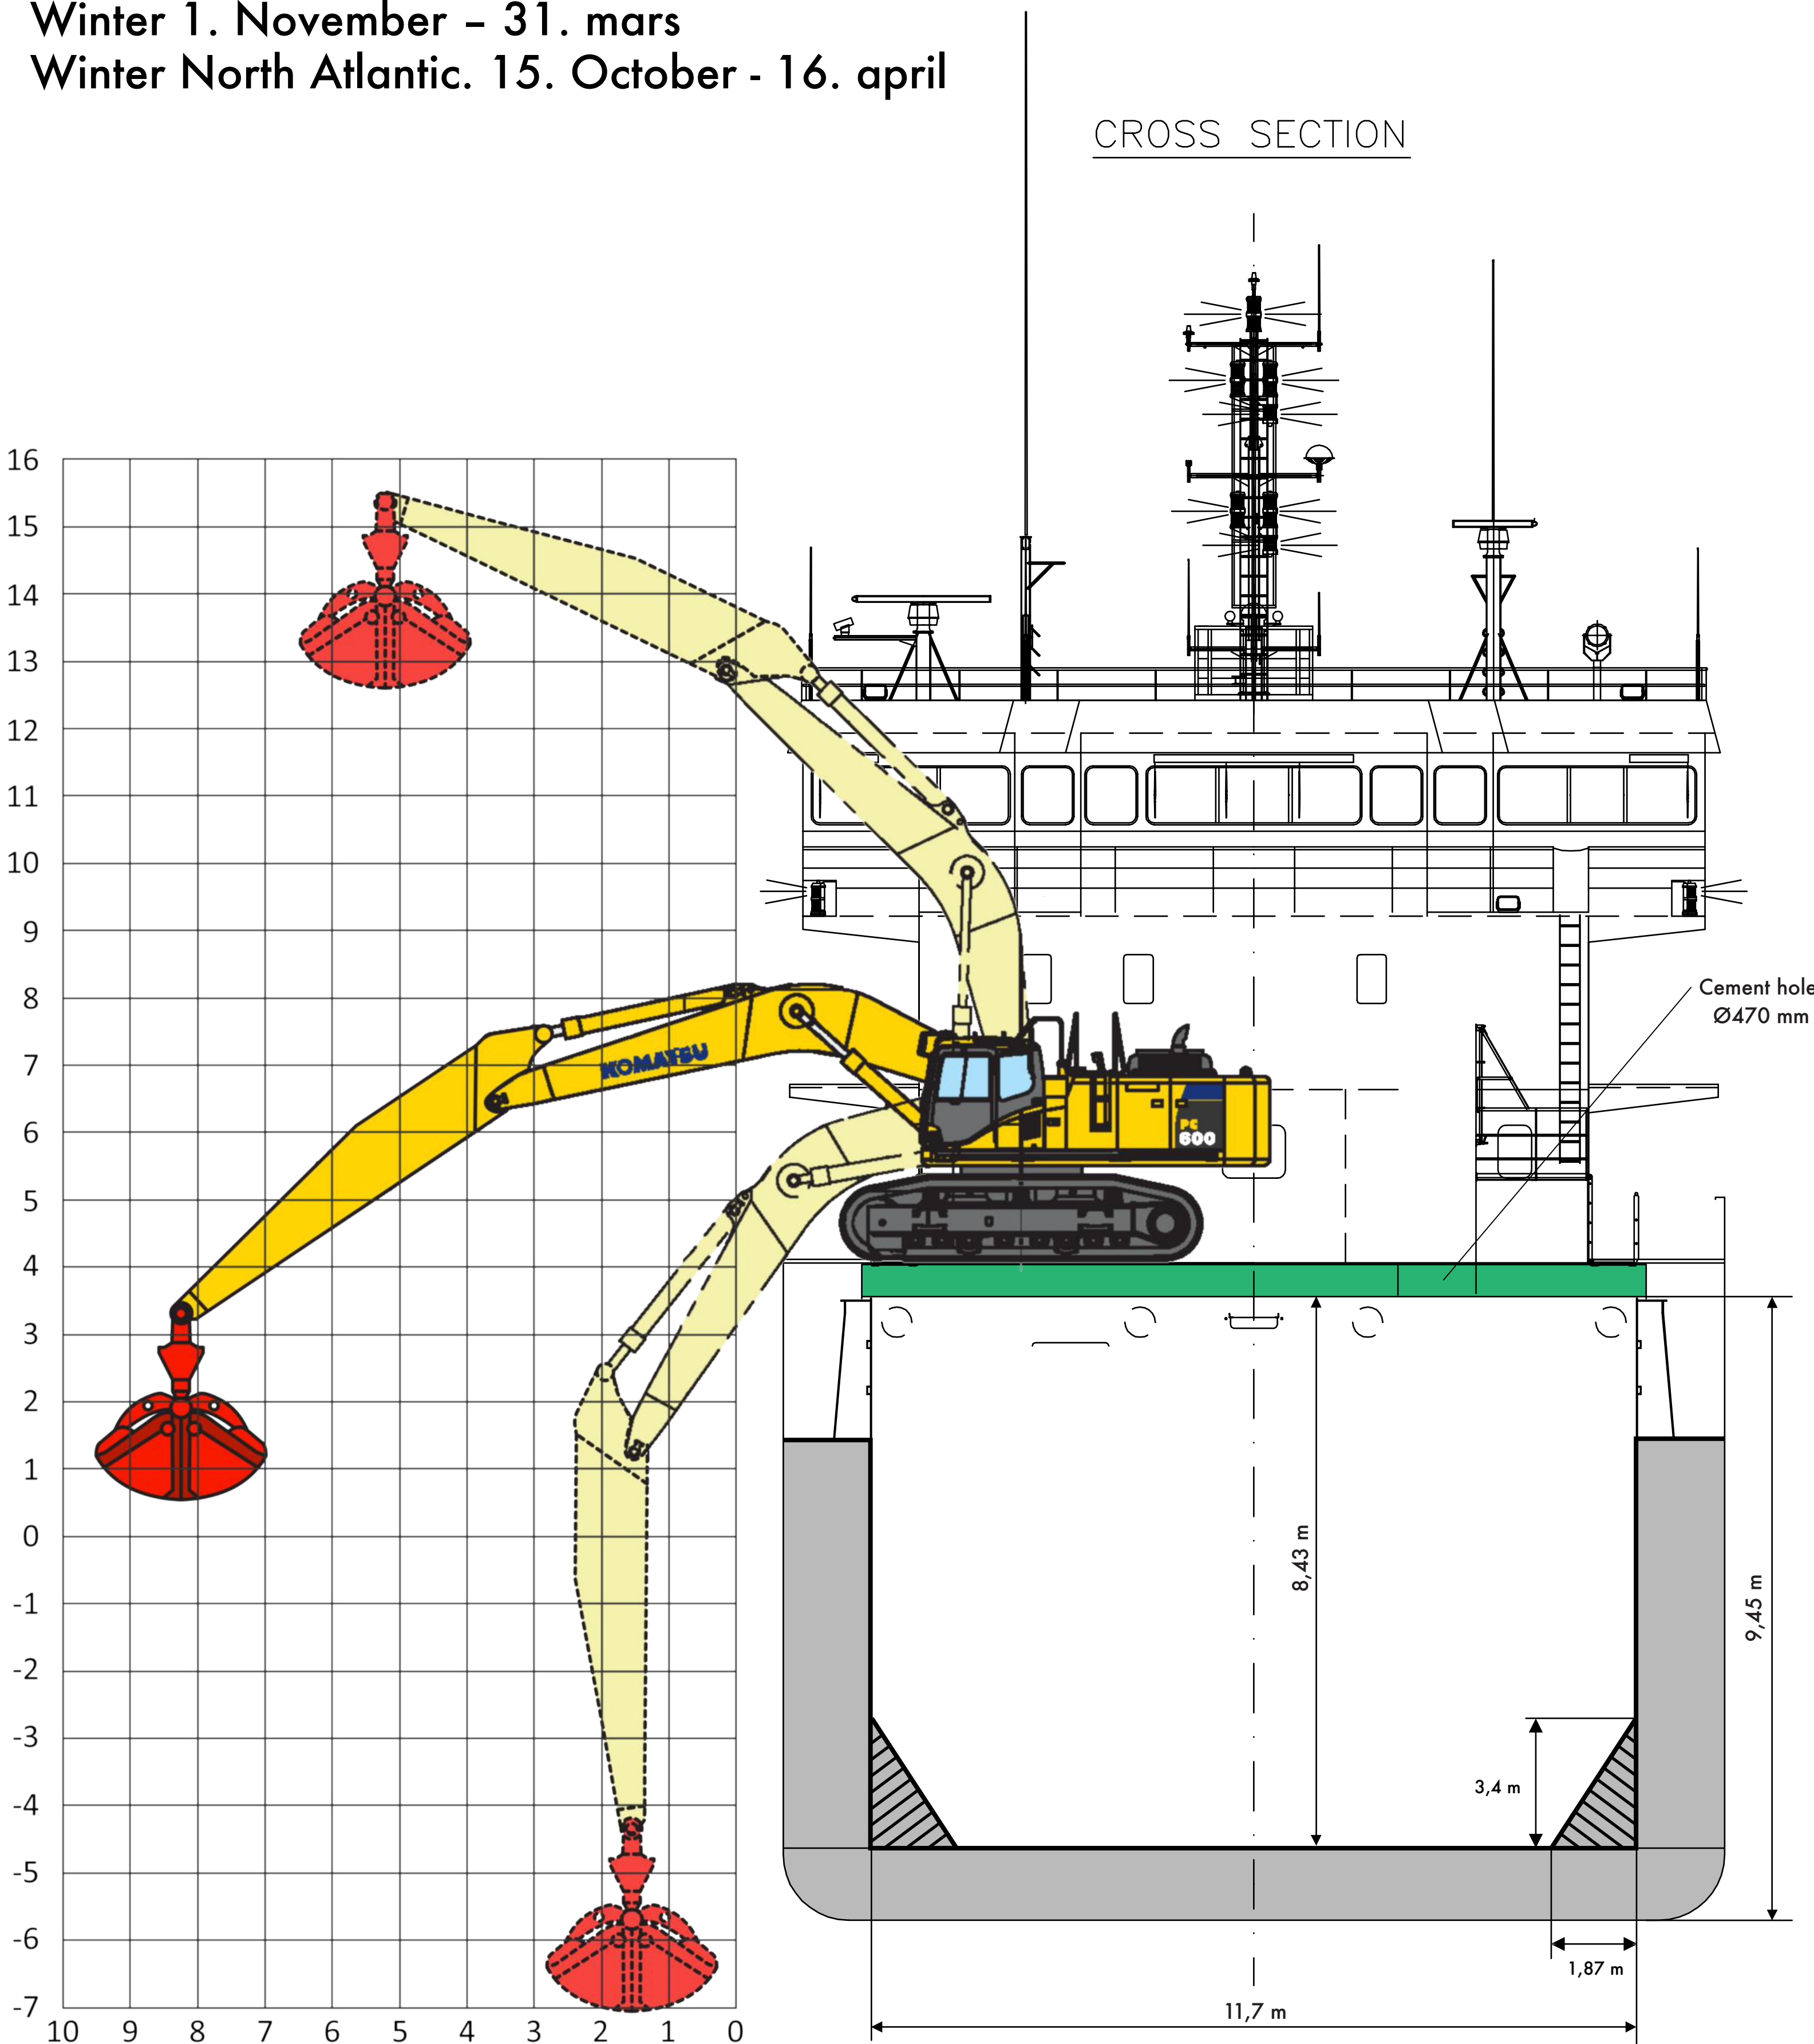

Draft at 100ton oil and 30ton water		
DRAFT	DWTC	t/cm
3.00m	1014,46	10,218
3.20m	1035,11	10,233
3.40m	1429,99	10,386
3.60m	1639,93	10,459
3.80m	1851,39	10,533
4.00m	2064,33	10,607
4.20m	2278,75	10,672
4.40m	2495,42	10,784
4.60m	2713,04	10,858
4.80m	2932,85	10,975
5.00m	3154,42	11,081
5.20m	3378,88	11,209
5.40m	3605,47	11,303
5.60m	3833,94	11,39
5.70m	3948,78	11,425
5.80m	4063,94	11,457
6.00m	4295,3	11,527
6.10m	4411,46	11,556
6.15m	4469,65	11,571
6.28m	4621,29	11,608

F CLASS Bulkhead position									
Aft								Fwd	
Comp	8	7	6	5	4	3	2	1	Total
Length m	3.70	5.00	10.80	7.00	4.40	11.30	11.30	7.80	63.00 meters
Volume m³	12.445	17.835	36.900	23.435	15.500	39.880	43.340	25.520	213.855 cu.ft
		inc B/H	213855.53 ft³	6056 m³		Sum Dr	5.842		
		ex B/H	214491.16 ft³	6074 m³		Sum DW	4.411		
						Win Dr	5.721		
						Win DW	4.272		
Length	169 ft		51.5 m						
Cubic	175890 ft³		4981 m³						